



**MODEL ER14335SP**  
**Lithium Thionyl Chloride**  
**(Li-SOCl<sub>2</sub>) Battery**

(International size reference: 2/3AA, ER14335M/SP)

PCB and PTC double protection

Over discharge, short circuit and forced charge protection

High drain/high pulse applications

## ELECTRICAL CHARACTERISTICS

(typical values for cells stored for one year or less, at 25°C)

■ **Nominal capacity** **1.35Ah**  
 (at 3.0 mA, +25°C, 2.3V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.)

■ **Rated voltage** **3.6 V**

■ **Maximum recommended continuous current** **150 mA**  
 (Maximum continuous current permitting 50% of the nominal capacity to be achieved at +20°C with the 2.3V cut off.)  
 (Higher currents possible. Consult OmniCel.)

■ **Maximum pulse current capability** **500 mA**  
 500mA / 1 second pulses, drained every 10 seconds at +20°C from undischarged cells with 10 μA base current, yield voltage reading above 3.0V.  
 Pulse capability varies according to pulse characteristics (frequency and duration), temperature, cell history (storage conditions prior to usage) and the application's acceptable minimum voltage.

■ **Storage** (recommended) **30°C max**  
 (possible without leakage) **-55° / +100°C**

■ **Operating temperature range** **-40° / +85°C**  
 (Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)

## KEY FEATURES

- ✓ Instant voltage response
- ✓ High minimum voltage during pulsing
- ✓ Low self discharge rate (less than 2% after 1 year of storage at +25°C)
- ✓ Stainless steel container
- ✓ Hermetic glass-to-metal sealing
- ✓ Absolute safety protection
- ✓ Non-flammable electrolyte


## MAIN APPLICATIONS

- ✓ Utility metering
- ✓ Military electronics
- ✓ Alarms and security devices
- ✓ Tracking systems
- ✓ Automotive electronics
- ✓ Professional electronics ... etc.


### ⚠ WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F (100°C), incinerate, or expose contents to water.


## DISCHARGE CHARACTERISTICS @ +25°C

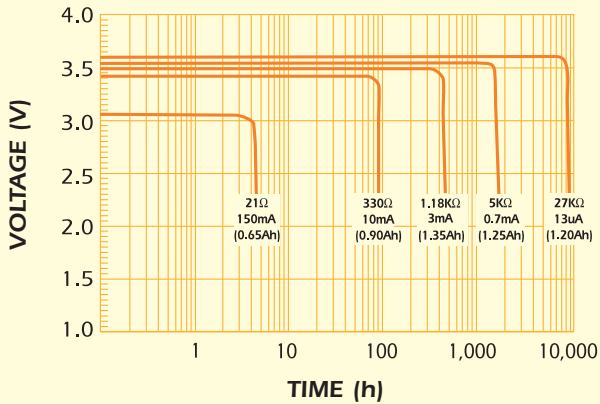


## VOLTAGE VS. TEMPERATURE

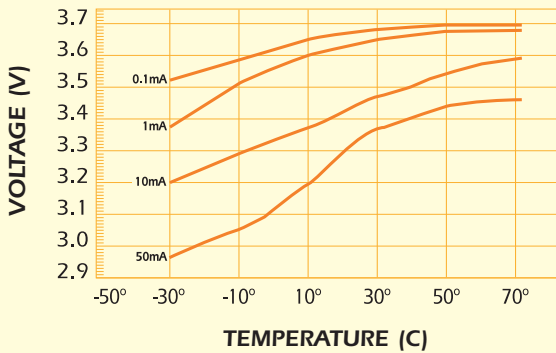

## CAPACITY VS. CURRENT

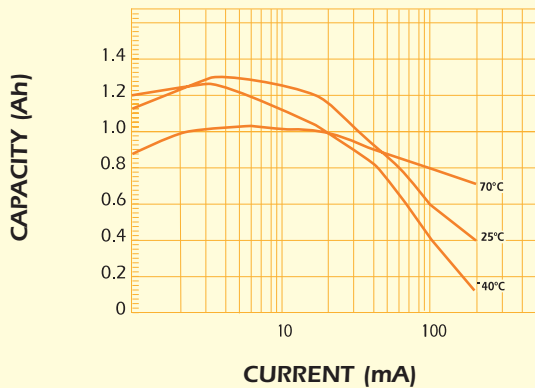

## ER14335SP

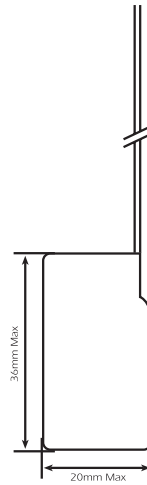

## AVAILABLE TERMINATIONS

Suffix -/W Wire Leads

## PHYSICAL CHARACTERISTICS

- Diameter (max) 20 mm (0.787")
- Height (max) 36 mm (1.417")
- Typical weight 15 g (0.529 oz)

## PULSE DISCHARGE CHARACTERISTICS

Pulse discharge: 500mA Temperature: 25°C

