

COIN CELL TAB CONFIGURATIONS (1)

Model No.	Dimensions/mm (inch)	Model No.	Dimensions/mm (inch)
CR1220/CW	<p>①</p>	CR1220/OP	<p>②</p>
CR1225/EW	<p>③</p>	CR1225/OP	<p>④</p>
CR1632/AWX	<p>⑤</p>	CR2016/LW1	<p>⑥</p>
CR2032/BW	<p>⑦</p>	CR2032/HW	<p>⑧</p>

COIN CELL TAB CONFIGURATIONS (2)

Model No.	Dimensions/mm (inch)	Model No.	Dimensions/mm (inch)
CR2032/AW	<p>⑨</p>	CR2032/CKW	<p>⑩</p>
CR2032/AKW	<p>⑪</p>	CR2032/EP1X	<p>⑫</p>
CR2032/CKP	<p>⑬</p>	CR2032/LP1W1	<p>⑭</p>
CR2032/LW1	<p>⑮</p>	CR2325/EW2	<p>⑯</p>


COIN CELL TAB CONFIGURATIONS (3)

Model No.	Dimensions/mm (inch)	Model No.	Dimensions/mm (inch)
CR2325/EGW2		CR2325/HW	
CR2325/2EW2		CR2325/GP	
CR2330/BW		CR2330/CKW	
CR2330/EP1		CR2330/CKP	

COIN CELL TAB CONFIGURATIONS (4)

Model No.	Dimensions/mm (inch)	Model No.	Dimensions/mm (inch)
CR2330/LW1		CR2330/EP1W	
CR3032/VP1		CR3032/LW1	
CR1616/LW1		CR1632/AW	
CR2025/LW1X		CR2032/DW	

CYLINDRICAL CELL TAB CONFIGURATIONS (2)

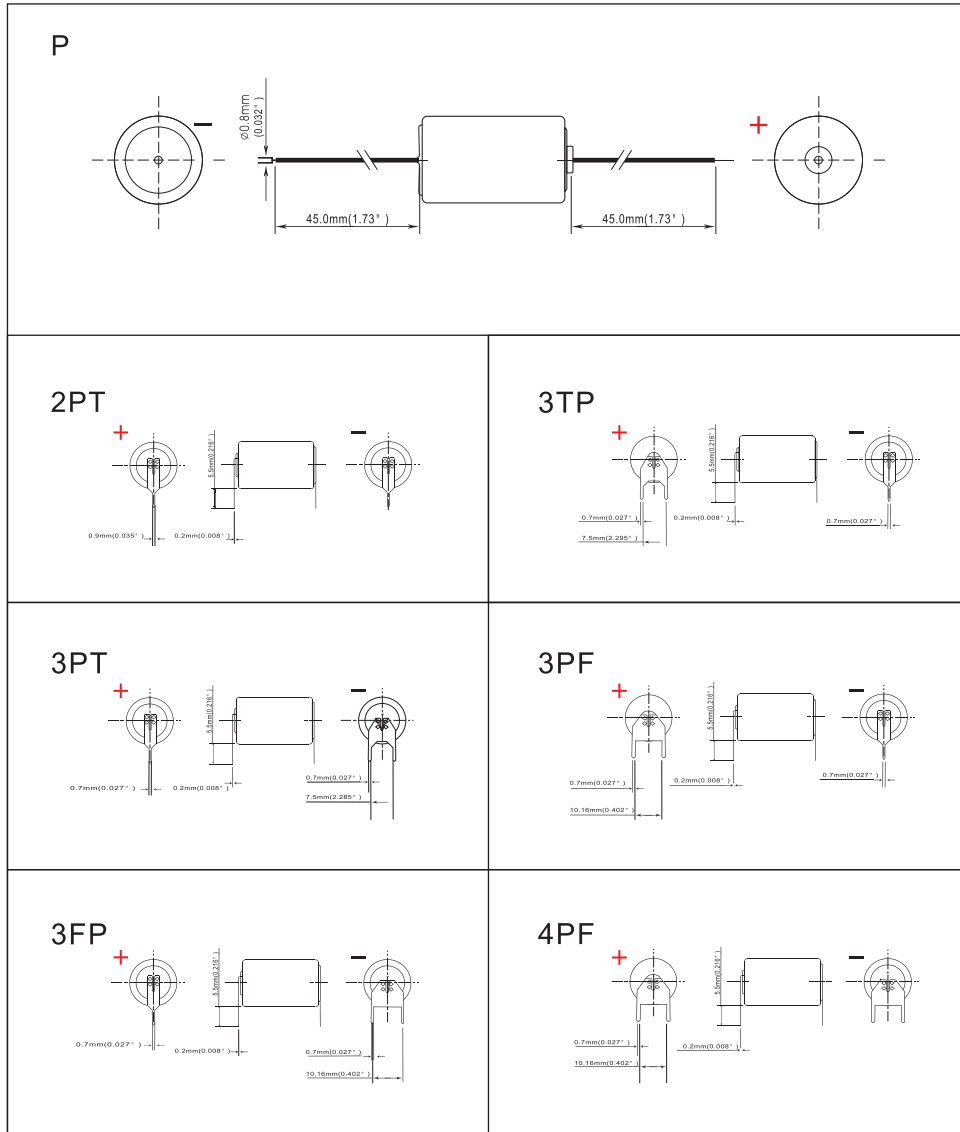

COIN CELLS								
Model	Nominal Voltage(V)	Nominal Capacity(mAh)	Nominal Discharge Current(mA)	Operating Temperature Range(°C)	Maximum Dimensions		Weight(g)	Page
					Diameter(mm)	Height(mm)		
CR1025	3.0	30	0.05	-20°C~+70°C	10.0	2.5	0.60	79
CR1216	3.0	28	0.05	-20°C~+70°C	12.5	1.6	0.70	80
CR1220	3.0	35	0.05	-20°C~+70°C	12.5	2.0	0.85	81
CR1225	3.0	50	0.05	-20°C~+70°C	12.5	2.5	1.00	82
CR1616	3.0	50	0.10	-20°C~+70°C	16.0	1.6	1.20	83
CR1620	3.0	70	0.10	-20°C~+70°C	16.0	2.0	1.30	84
CR1625	3.0	95	0.10	-20°C~+70°C	16.0	2.5	1.40	85
CR1632	3.0	120	0.10	-20°C~+70°C	16.0	3.2	1.60	86
CR2016	3.0	80	0.20	-20°C~+70°C	20.0	1.6	1.80	87
CR2025	3.0	160	0.20	-20°C~+70°C	20.0	2.5	2.50	88
CR2032	3.0	225	0.20	-20°C~+70°C	20.0	3.2	3.10	89
CR2032-SL	3.0	225	0.20	-20°C~+70°C	20.0	3.2	3.10	90
CR2320	3.0	150	0.20	-20°C~+70°C	23.0	2.0	2.90	91
CR2330	3.0	255	0.20	-20°C~+70°C	23.0	3.0	4.00	92
CR2354	3.0	500	0.20	-20°C~+70°C	23.0	5.4	6.00	93
CR2430	3.0	280	0.20	-20°C~+70°C	24.5	3.0	4.50	94
CR2450	3.0	600	0.20	-20°C~+70°C	24.5	5.0	6.50	95
CR2477	3.0	1000	0.40	-20°C~+70°C	24.5	7.7	8.00	96
CR3032	3.0	500	0.40	-20°C~+70°C	30.0	3.2	7.50	97

CYLINDRICAL CELLS								
Model	Nominal Voltage(V)	Nominal Capacity(mAh)	Nominal Discharge Current(mA)	Operating Temperature Range(°C)	Maximum Dimensions		Weight(g)	Page
					Diameter(mm)	Height(mm)		
ZCR5	6.0	1400	10	-40°C~+85°C		34*17*45	42.0	98
CR2	3.0	850	10	-40°C~+85°C	15.6	27.0	13.0	99
CR123A	3.0	1500	10	-40°C~+85°C	17.0	34.5	20.0	100
CR14250	3.0	650	10	-40°C~+85°C	14.5	25.0	11.0	101
CR14335	3.0	800	10	-40°C~+85°C	14.5	33.5	14.0	102
CR14505	3.0	1600	10	-40°C~+85°C	14.5	50.5	21.0	103
CR17250	3.0	750	10	-40°C~+85°C	17.0	25.0	14.0	104
CR17450	3.0	2300	10	-40°C~+85°C	17.0	45.0	26.0	105
CR17505	3.0	2400	10	-40°C~+85°C	17.0	50.5	30.0	106
CR18505	3.0	2800	10	-40°C~+85°C	18.5	60.5	35.0	107
CR26500	3.0	5000	10	-40°C~+85°C	26.0	50.5	62.0	108
CR-P2	6.0	1400	10	-40°C~+85°C		35*19.5*36	42.0	109
CR9V-P	9.0	1200	9	-40°C~+85°C		26.2*17.2*49.2	50.5	110