


## Manganese Dioxide Lithium Cylindrical Batteries: Individual Specifications

### CR-V3p


#### ■ Dimensions(mm)

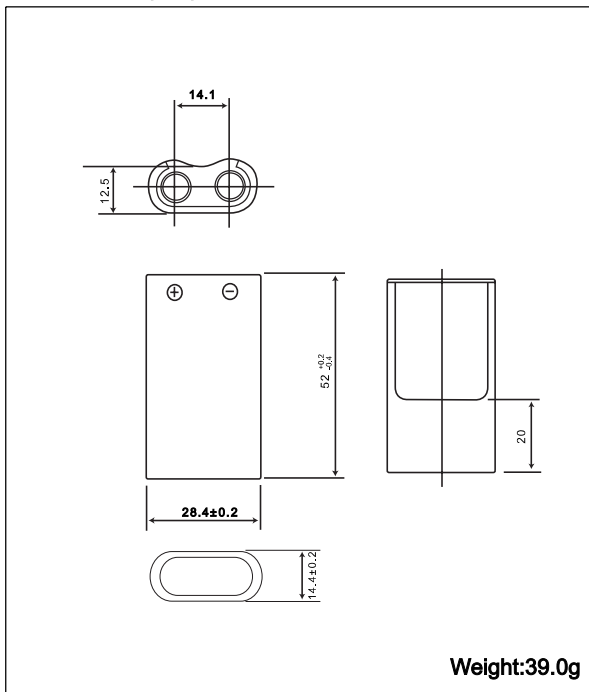

#### ■ Specification

|                               |            |
|-------------------------------|------------|
| Nominal voltage (V)           | 3          |
| Nominal capacity (mAh)        | 3,000      |
| Continuous standard load (mA) | 200        |
| Operating temperature (C)     | -40 ~ +70° |

#### Discharge Characteristics of CR-V3p(2pc)and"AA" Alkaline Cell (LR6,4pcs)

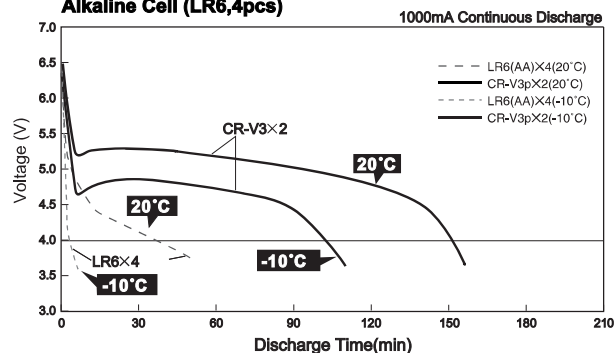

\* Please consult Panasonic for use below and above -20°C to +60°C